

GO

ewo.com/GO

- 1
 - 1.1 Color temperature: cool white (5,700 K) / neutral white (4,000 K) / warm white (3,000 K)
 - 1.2 Housing accommodates 1 LED lighting unit (3 or 4 LED PCB)
 - 1.3 Current feed: 200 mA–600 mA, depending on ambient temperature
 - 1.4 Electronic operating device with DALI interface or 1–10 V or stand-alone programming


- 2
 - 2.1 Different pattern characteristics for street, walkway, and large area lighting
 - 2.2 LS33 Q, LS33 Q satiné, LP33 Q, LP33 Q satiné, LS43 Q, LS43 Q satiné, LP43 Q, LP43 Q satiné
 - 2.3 Lens made from PMMA

- 3
 - 3.1 Cover in single-pane safety glass (ESG)
 - 3.2 Housing made from die-cast aluminum
 - 3.3 Suitable for pole top diameter \varnothing 60mm, optional adapter for \varnothing 76mm
 - 3.4 Finish: Aluminum vibratory finishing, or polyester powder coating, anthracite (DB 703), other colors upon request




 IP66 RoHS

Dimension

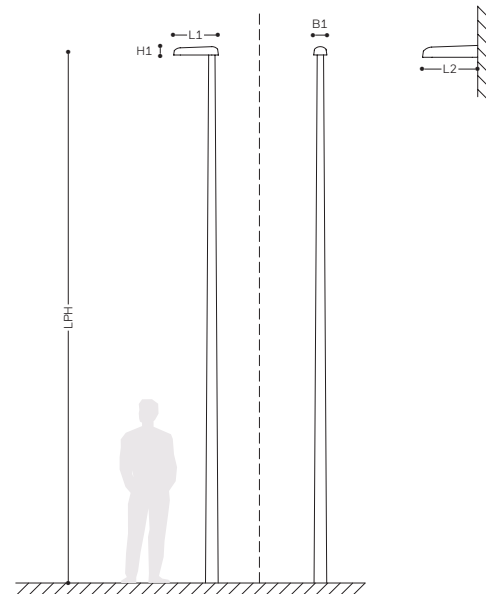

Available Designs





Models / Equipment Variations



GO
1 LU
(3 LED PCB)



GO
1 LU
(4 LED PCB)



Luminaire and pole polyester
powder coated, anthracite
(DB 703)



Luminaire aluminium vibratory
finished, pole made from
hot-dip galvanized steel

Model	LPH[m]*	L1[mm]	H1[mm]	B1[mm]	L2[mm]	Pole	Lighting units (LU)
GO	3-5.5	424	79	125	368	MK_ _ _-(F)	1

* in 0.5 m steps