

PL

1

- 1.1 Color temperature: cool white (5,700 K) / neutral white (4,000 K) / warm white (3,000 K)
- 1.2 Housing accommodates up to 3 LED lighting units (3 LED PCB)
- 1.3 Current feed: 300 mA–600 mA, depending on ambient temperature
- 1.4 Electronic operating device with DALI interface or 1–10 V or stand-alone programming
- 1.5 LED lighting units each adjustable $\pm 5^\circ$

2

- 2.1 Different pattern characteristics for street, walkway, and large area lighting
- 2.2 LS33, LS33 satiné, LS34, LS34 satiné, LS35, LP33, LP33 satiné
- 2.3 Lens made from PMMA, with aluminum support plate


3

- 3.1 Housing made of aluminum, cover in single-pane safety glass (ESG), bracket made of stainless steel
- 3.2 Pole made of hot-dip galvanized steel with cable insertion opening, junction box and service door
- 3.3 Finish: polyester powder coating, anthracite (DB 703), other colors upon request



 IP66 RoHS

Dimension

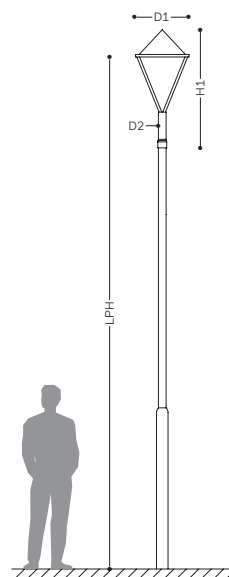


Available Designs



Pole top



Models / Equipment Variations



PL530
1-3 LU



| Model | LPH [m] | D1 [ø mm] | D2 [ø mm] | H1 [mm] | Pole | Lighting units (LU) |
|-------|---------|-----------|-----------|---------|------|---------------------|
| PL530 | 4.5-6.3 | 530 | 76 | 1,170 | MFE | 1-3 |