








IP66 RoHS IK10 pending






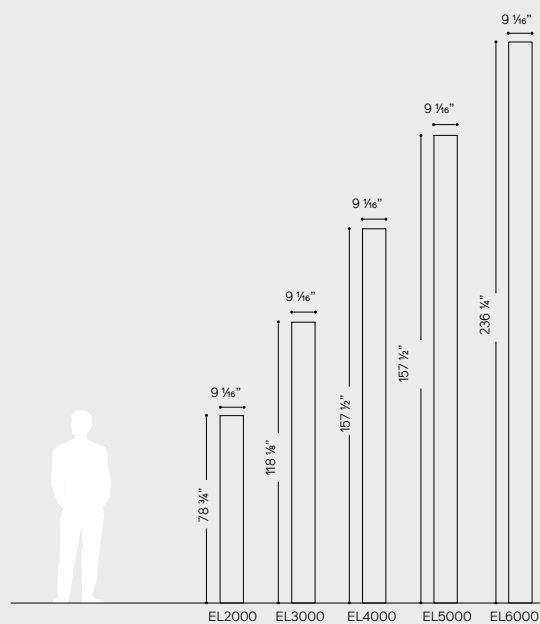


Driver	A-Series	T-Series
Control options	       	
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone	
Control accessories	Further accessories on request	
Software	connex-x light management for remote management and control	



RGBW

Optics	AG01	AG02	AG03	AG04	AH02	AS06	AP07	AS07	AS08	TS11	TP08
MacAdam ellipses (SDCM)	≤ 5 SDCM	≤ 5 SDCM									
Max Lumens per Watt	114.7	114.5	116.7	119.7	114.7	101.8	101.2	111	114	70	88.3
Model	EL2000	EL3000	EL4000	EL5000	EL6000		EL2000	EL3000	EL4000	EL5000	EL6000
Light units	1–2	1–3	1–4	1–5	1–6		1–2	1–3	1–4	1–5	1–6
Lumin. flux [lm]	300–15,100	300–22,700	300–30,300	300–37,900	300–45,500		5,400	8,100	10,800	13,500	16,200
BUG Rating	B0 U1 G1	B0 U1 G1	B0 U1 G1	B0 U1 G1	B0 U1 G1		B0 U1 G1	B0 U1 G1	B0 U1 G1	B0 U1 G1	B0 U1 G1



ewo

EL Light Columns



*Note: Please use our Configurator for accurate configuration of multiple light elements.

EL

-

-

-

-

-

-

-

-

-

Lighting Type

A-Series

T-Series

Height

4.92FT

6.56FT

8.20FT

9.84FT

11.48FT

13.12FT

14.76FT

16.40FT

18.04FT

19.69FT

Output*

200 mA

250 mA

300 mA

350 mA

400 mA

450 mA

500 mA

550 mA

600 mA

650 mA

700 mA

Required_____

CCT

2.2K - 2200K

2.7K - 2700K

3K - 3000K

4K - 4000K

5.7K - 5700K

TW- Tunable White

RGBW

Optic*

AP07 satineAsymmetric extra forward

AS06 satineAsymmetric extra side throw

AS08 satineAsymmetric side and forward

TS11Asymmetric side and forward throw

TS08Asymmetric extra forward throw

Finish**

Cor-Ten Steel

RAL7015

RAL9005

RAL7016

DB703

RAL9007

RAL9006

RAL8019

D2525 Gris 2900

RAL____ - Custom

Mounting*

AC - Anchor Cage

BB - Buried Base

Control

On/Off

0-10V

DALI

DMX

Cloud

ECP*

ECP

NoECP

* Enhanced Corrosion Protection

**Custom colors are available with an upcharge

* Other outputs on request