


ewo

IDstandard

Public space



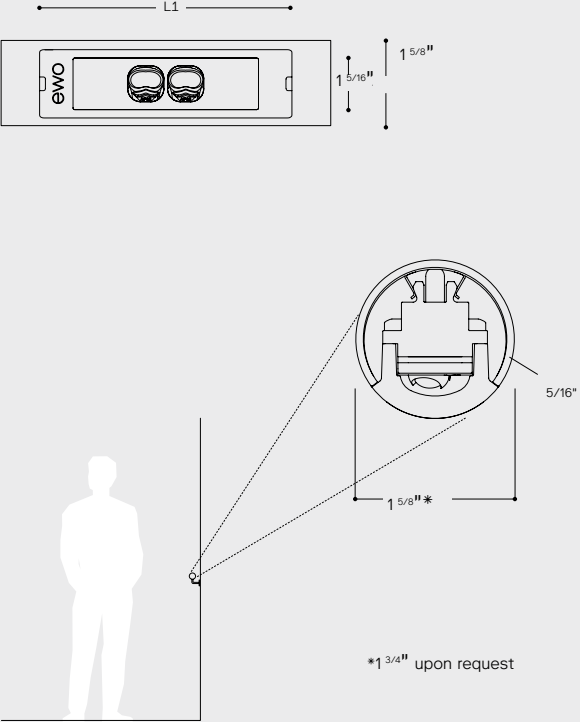

Configurator

CE RoHS IP67 IK10 UL/CSA
Protection class III (<18 LED)

Housing	
Housing material	ID1, ID2 and ID4 die-cast aluminium (EN44300)
Housing finish	Aluminum
Cover	PMMA

Measurements			
Model	LEDs	L1 [in]	Weight [lbs]Ⓞ
IDstandard	1-2 LEDs	4.9	0.40
IDstandard	4 LEDs	6.5	0.51
Ⓞ max. weight without tube			


Electrical	
A-Series	
Protection class	II/III
Voltage [V], [Hz]	-
Current feed max. [mA]	500
LED power max. [W]	6.0

Operating conditions	
Lifetime	Visit the configurator for specific lifetime options


Driver (external)	
A-Series	
Control options	     
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone
Control accessories	Further accessories on request
Software	connex-x smart lighting system (Leitfeld) for remote control, monitoring, and environmental sensing




Precision lens optics




AH02
Symmetric Wide Flood
Type VS




AP06
Asymmetric Extra Side Throw
Type III Medium



AP07
Asymmetric Extra Forward
Type IV Short



AS07
Asymmetric Side Throw
Type II Short



AS09*
Asymmetric Extra Side Throw
Type I Short



Shape your own light by combining
any light distribution



2,200 K
CRI ≥ 70



2,700 K
CRI ≥ 70



3,000 K
CRI ≥ 80



4,000 K
CRI ≥ 70

CRI ≥ 80
on request

Performance

Optics	AP06	AP07	AS07	AS09
MacAdam ellipses (SDCM)	≤ 5 SDCM			
BUG Rating	B0 U1 G1	B0 U1 G0	B0 U1 G0	B0 U1 G0
Max lumens per watt	114.7	115.2	132.2	119.4

Model	IDstandard	IDstandard	IDstandard
Light units	1	2	4
Luminous flux [lm]	51–162	121–370	242–640

Equipment variations



IDstandard 1 LED



IDstandard 4 LEDs



IDstandard 2 LEDs

ID Standard



ID	–		–		–		–		–		
Optic*		Output*		*CCT		Light Units		Control		Cable Length	
AH02	Symmetric wide flood	300 mA	474lm	2.2K - 2200K		1 - 1 Light Unit		On/Off		3FT	
AP06	Asymmetric extra side throw	350 mA	544lm	2.7K - 2700K		2 - 2 Light Units		DALI		6FT	
AP07	Asymmetric extra forward throw	400 mA	612lm	3K - 3000K		4 - 4 Light Units		0-10V		10FT	
AS07	Asymmetric side throw	450 mA	677lm	4K - 4000K				ZHAGA		CUS - Custom Length	
AS09	Asymmetric extra side throw	500 mA	740lm					NEMA			
		Requested	___lm					Wireless			

* Lumens based on AS09 optic, 4 light units and 4000K CCT
* Other outputs on request