



- Projector
- Wall luminaire
- Pole mounted system



E-Series

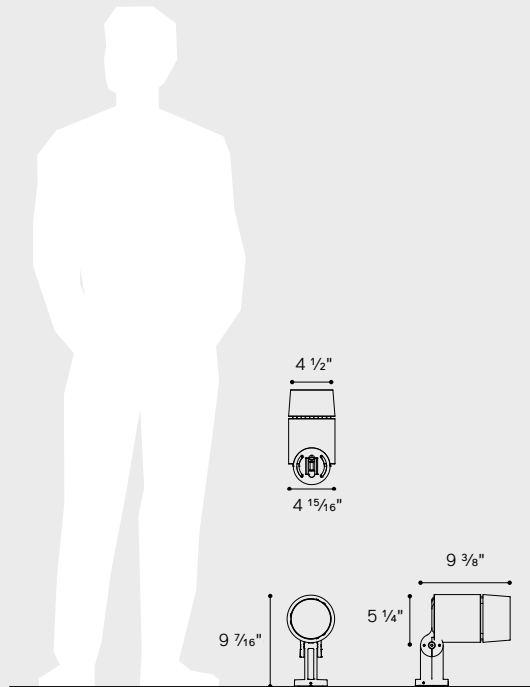

P66 RoHS IP68 UL/CSA

* other colors on request
** proprietary three step coating process to ensure extreme corrosion protections in environments such as salt water and chlorine


Model	①	②	Weight [lb]
C125	0.13*	0.22*	5.1*
	① projected windage area [ft²]		* without accessories
	② lateral windage area [ft²]		

Lifetime Visit the [configurator](#) for specific lifetime options

	Monochrome		Tunable White				RGBW			
			Discrete		Internal		Discrete		Internal	
	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series
Voltage [V], [Hz]	120-277, 50 / 60						120-277, 50 / 60			120-277, 50 / 60
LED nr.	6	3	-	-	-	12	-	-	-	12
Current max. [mA]	1,000	1,000*	-	-	-	500	-	-	-	400
LED power [W]	21.1	11.3	-	-	-	10.8	-	-	-	17.8
	* 700 for EG06 – 4°									

Driver (internal)	Monochrome	RGBW	Tunable White
Control Options			
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone		
Control accessories	Further accessories on request		
Software	connex-x light management for remote management and control		

Monochrome

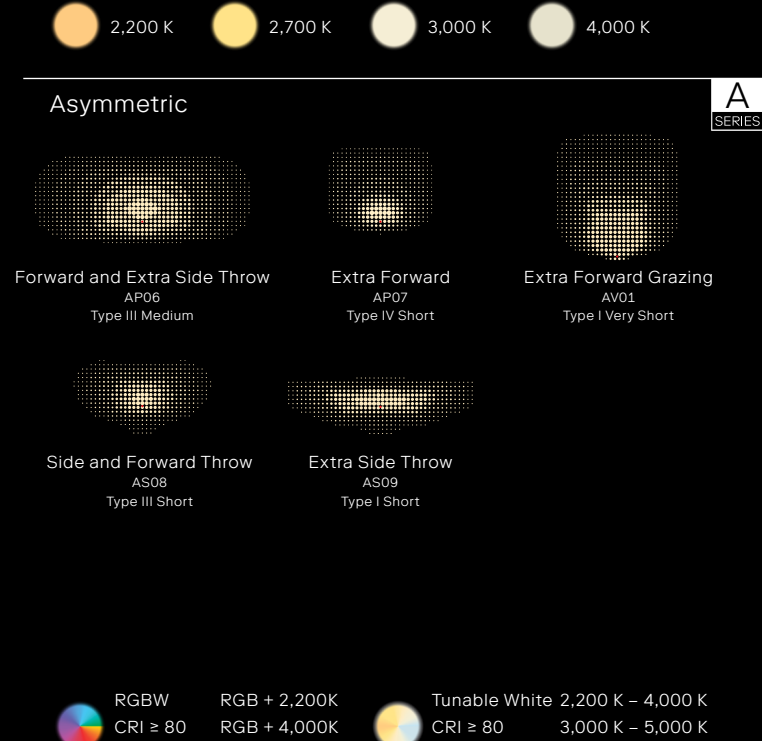

RGBW & TW

Narrow 12°
EGM01
Type VS

EGM01 + Filter = 25°
EGM01 + Filter = 14°x62°

		EGX01 + Filter = 50°
		EGX01 + Filter = 60°
		EGX01 + Filter = 80°
Narrow 15°	Medium 25°	EGX01 + Filter = 16°x34°
EGX01	EGX02	EGX01 + Filter = 17°x62°
Type VS	Type VS	

	Monochrome		Tunable White		RGBW
Light colors (K)	4,000		5,000		4,000
CRI*	≥ 80		≥ 80		≥ 80
Distribution	AG01	EG06 6°	EGX01 15°		EGX01 15°
BUG Ratings	B3 U0 G0	B2 U0 G0	B1 U0 G0		B1 U0 G0
Max Lumens per Watt	104.3	96.5	92.6		67.4
MacAdam ellipses	≤ 3 SDCM		≤ 3 SDCM		≤ 3 SDCM
Luminous flux [lm]	2,200	1,090	1,000		1,200

Chameleon C125 Integral





C125I




Optic*		Output*		CCT	External Accessory	Decorative Accessory	Internal Accessory	Cable	Finish*	Mounting	Control	ECP*
AG01	Symmetric Narrow 12°	350 mA	937lm	2.2K - 2200K	FS - Full Snoot	FSH - Full Shade	HL - Honeycomb Louver	3FT	RAL7015	WB - Wall Bracket	On/Off	ECP
AG02	Symmetric Medium 27°	400mA	1047lm	2.7K - 2700K	HS - Half Snoot	SLSH - Slotted Shade	CL - Circular Louver	10FT	RAL7016	SP - Ground Spike	0-10V	NoECP
AG03	Symmetric Flood 48°	450mA	1156lm	3K - 3000K	TS - Transparent Snoot	SS - Shadow Sail	NI - None	15FT	RAL9005	CB - Connection box	DALI	* Enhanced Corrosion Protection
AG04	Symmetric Elliptical 10-40°	500mA	1264lm	4K - 4000K	NE - None	HS - Heritage Sail		CUS - Custom	RAL9006	PA - Pole adaptor	DMX	
AH02	Symmetric Wide Flood 75°	550 mA	1370lm	TW - Tunable White		SF - Scenic Filter			RAL9007	SPA - Single pole adaptor	ZHAGA	
AP06	Asymmetric Forward and Extra Side Throw	600mA	1476lm	RGBW		ND - None		RAL____	DPA - Double pole adaptor	NEMA		
AP07	Asymmetric Extra Forward	650mA	1580lm							VN - V-Notch Pole*	Wireless	
AS08	Asymmetric Side and Forward Throw	700mA	1684lm								Cloud	
AV01	Asymmetric Extra Forward Grazing	750mA	1774lm									
AS09	Extra Side Throw	800mA	1864lm									
EG06-4	Symmetric Narrow 4°	850mA	1952lm									
EG06-6	Symmetric Narrow 6°	900mA	2040lm									
EGM01	Narrow 12°	950mA	2127lm									
EGX01	Narrow 15°	1000mA	2213lm									
EGX02	Narrow 15°	Required: ____lm										
Required	_____											

External accessories



Shadow Sail

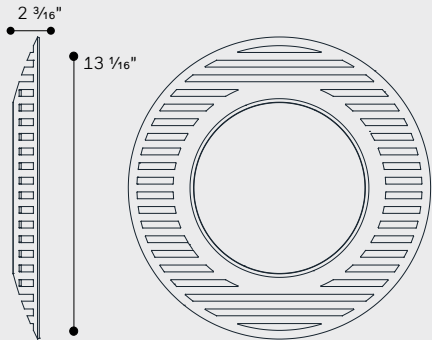

Transparent Snoot

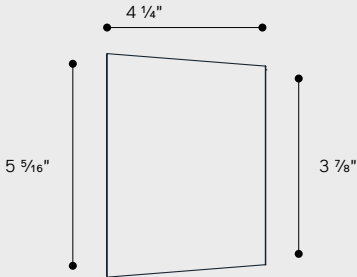




Heritage Sail


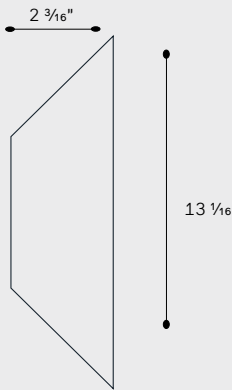



Support for scenic Filters




For custom C125 accessories,
please contact ewo USA

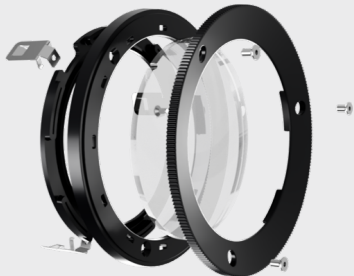

Snoot

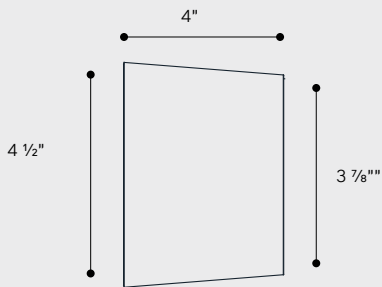


Half Snoot

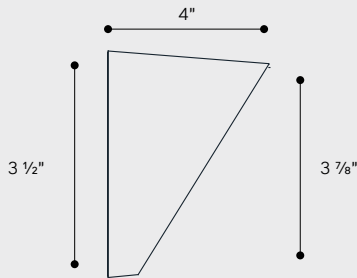


Internal accessories

Honeycomb Louver



ewo
Colors



Circular Louver



ewo
Colors


Mounting accessories

Wall Bracket





ewo
Colors

V-Notch

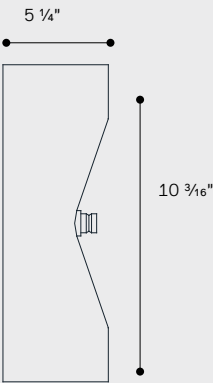



ewo
Colors

Pole adaptor

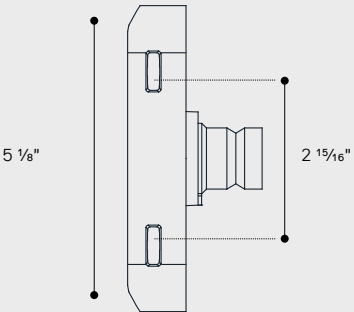

ewo
Colors




Catenary






ewo
Colors

Mounting accessories




Connection box

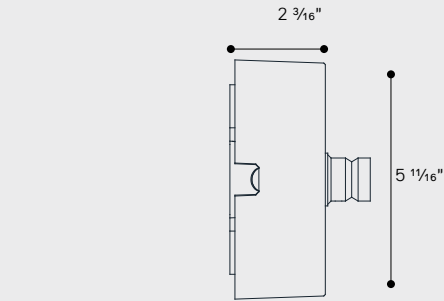

Single pole adapter

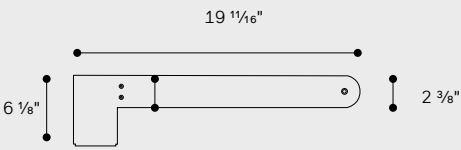

Double pole adapter

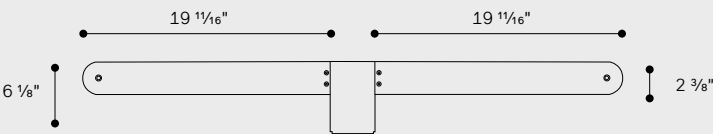

Ground spike

