


ewo

Chameleon C125 Slice

C125 Slice


Projector
Wall luminaire
Pole mounted system



A-Series



E-Series

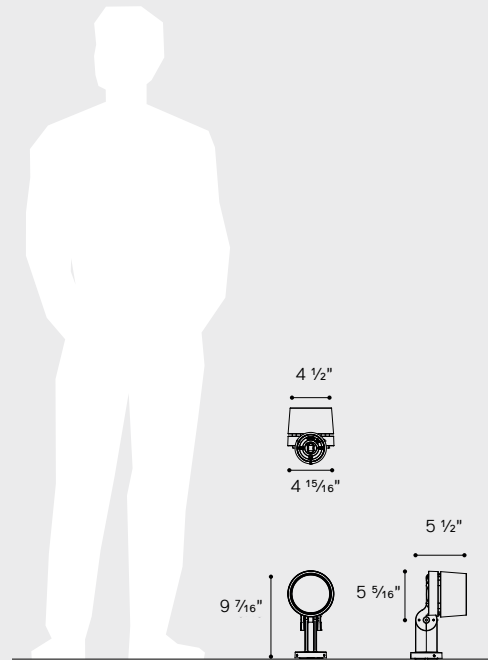

[Check out our online Configurator](#)



IP66 RoHS IK08 UL/CSA

Housing	
Housing material	Aluminum die-cast
Housing finish	Polyester powder coating (ewoECP upon request**)
Finish standard colour	RAL 9007, 7015, 9005, 7016, 9007, 9006, 8019, DB703, D2525 Gris 2900
Glass	Safety glass (ESG)
Mounting options	Pole, wall, surface
* other colors on request	
** ewo three steps process (high quality alloy, pre-treatment, primer) to ensure extreme corrosion resistance	

Measurements			
Model	①	②	Weight [lb]
C125	0.13*	0.22*	5.1*
① projected windage area [ft²]			* without accessories
② lateral windage area [ft²]			

Operating conditions

Lifetime	Visit the configurator for specific lifetime options
----------	--

Electrical

	Monochrome		Tunable White				RGBW			
			Discrete		Internal		Discrete		Internal	
	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series	A-Series	E-Series
Voltage [V], [Hz]										
LED nr.	6	3	-	-	-	12	-	-	-	12
Current max. [mA]	1,000	1,000*	-	-	-	500	-	-	-	550
LED power [W]	18.0	9.0	-	-	-	10.8	-	-	-	19.5
* 700 for EG06 – 4°										

Driver (external)	Monochrome	RGBW	Tunable White
Control Options	 	 	
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone		
Control accessories	Further accessories on request		
Software	connex-x light management for remote management and control		

Light distributions

Monochrome

Symmetric

			E SERIES	A SERIES
Ultra Narrow 4° EG06 Type VS	Extra Narrow 6° EG06 Type VS	Narrow 12° AG01 Type VS		
Medium 28° AG02 Type VS	Flood 50° AG03 Type VS	Wide Flood 75° AH02 Type VS		
Elliptical 10°–40° AG04 Type I Very Short				



Asymmetric

			A SERIES
Forward and Extra Side Throw AP06 Type III Medium	Extra Forward AP07 Type IV Short	Extra Forward Grazing AV01 Type I Very Short	
Side and Forward Throw AS08 Type III Short	Extra Side Throw AS09 Type I Short		



RGBW & TW

Internal colors mixing

		E SERIES
EGM: optimal internal mixing		
Narrow 12° EGM01 Type VS	EGM01 + Filter = 25° EGM01 + Filter = 14°x62°	

EGX: high performance internal mixing

Narrow 15° EGX01 Type VS	Medium 25° EGX02 Type VS	EGX01 + Filter = 50° EGX01 + Filter = 60° EGX01 + Filter = 80° EGX01 + Filter = 16°x34° EGX01 + Filter = 17°x62°
--------------------------------	--------------------------------	--

Performance

	Monochrome		Tunable White	RGBW
Light colors (K)	4,000		5,000	4,000
CRI*	≥ 80		≥ 80	≥ 80
Distribution	AG01	EG06 6°	EGX01 15°	EGX01 15°
BUG Ratings	B3 U0 G0	B2 U0 G0	B1 U0 G0	B-1 U-0 G-0
Max Lumens per Watt	122.2	121.1	92.6	61.5
MacAdam ellipses	≤ 3 SDCM		≤ 3 SDCM	≤ 3 SDCM
Luminous flux [lm]	2,200	1,090	1,000	1,200

Chameleon C125 Slice



C125S

Optic*	Output*	CCT	External Accessory	Decorative Accessory	Internal Accessory	Cable	Finish	Mounting	Control	ECP*
AG01 Symmetric Narrow 12°	350 mA 937lm	2.2K - 2200K	FS - Full Snoot	FSH - Full Shade	HL - Honeycomb Louver	3FT	RAL7015	WB - Wall Bracket	On/Off	ECP
AG02 Symmetric Medium 27°	400mA 1047lm	2.7K - 2700K	HS - Half Snoot	SLSH - Slotted Shade	CL - Circular Louver	10FT	RAL7016	SP - Ground Spike	0-10V	NoECP
AG03 Symmetric Flood 48°	450mA 1156lm	3K - 3000K	TS - Transparent Snoot	SS - Shadow Sail	NI - None	15FT	RAL9005	CB - Connection box	DALI	* Enhanced Corrosion Protection
AG04 Symmetric Elliptical 10-40°	500mA 1264lm	4K - 4000K	NE - None	HS - Heritage Sail		CUS - Custom	RAL9006	PA - Pole adaptor	DMX	
AH02 Symmetric Wide Flood 75°	550 mA 1370lm	TW - Tunable White		SF - Scenic Filter			RAL9007	SPA - Single pole adaptor	ZHAGA	
AP06 Asymmetric Forward and Extra Side Throw	600mA 1476lm	RGBW		ND - None			RAL____	DPA - Double pole adaptor	NEMA	
AP07 Asymmetric Extra Forward	650mA 1580lm							VN - V-Notch Pole*	Wireless	
AS08 Asymmetric Side and Forward Throw	700mA 1684lm								Cloud	
AV01 Asymmetric Extra Forward Grazing	750mA 1774lm									
AS09 Extra Side Throw	800mA 1864lm									
EG06-4 Symmetric Narrow 4°	850mA 1952lm									
EG06-6 Symmetric Narrow 6°	900mA 2040lm									
EGM01 Narrow 12°	950mA 2127lm									
EGX01 Narrow 15°	1000mA 2213lm									
EGX02 Narrow 15°	Required: ____lm									
Required _____										

* Lumens based on AG01 optic and 4000K CCT



* Other outputs on request

*Other colors available with an upcharge




*See V-Notch spec sheet

External accessories


Shadow Sail

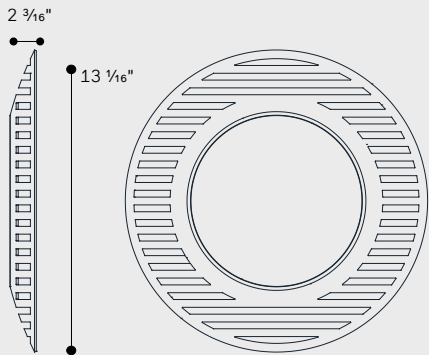

Transparent Snoot

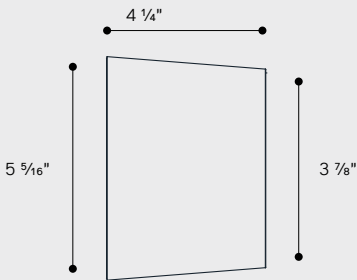




Heritage Sail






Support for scenic Filters




For custom C125 accessories,
please contact ewo USA

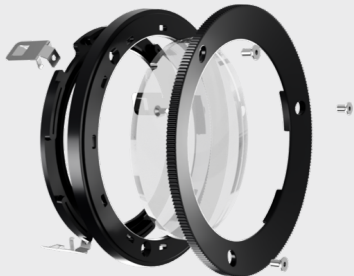

Snoot

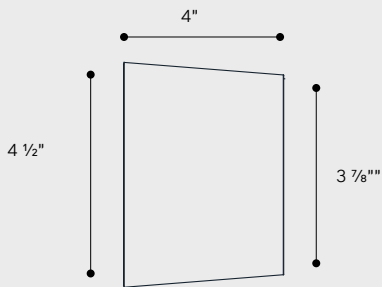


Half Snoot

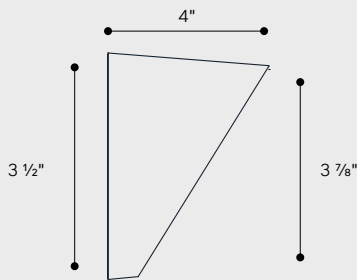

Internal accessories



Honeycomb Louver



ewo
Colors


Mounting accessories

Wall Bracket




ewo
Colors

Circular Louver





ewo
Colors

V-Notch

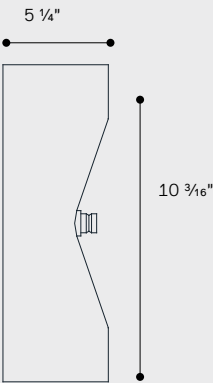


ewo
Colors

Pole adaptor

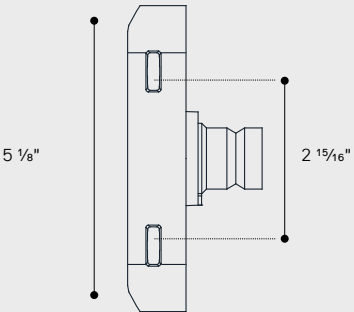

ewo
Colors




Catenary






ewo
Colors

Mounting accessories




Connection box

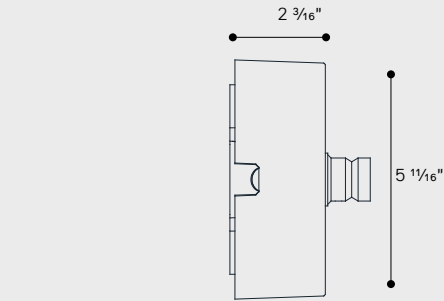

Single pole adapter

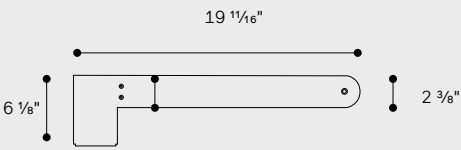

Double pole adapter

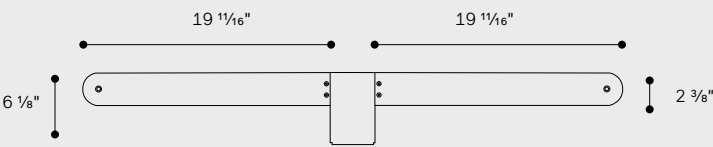

Ground spike

